

2 a first slide and actuator carried on the Substitutable Mould Part or on  
 3 the Base Mould Part, the slide extending at least substantially radially  
 4 of a centreline of the mould tool  
 5 a Replacement Mould Part carrier slidably mounted on the slide under  
 6 control of the actuator and  
 7 a second slide and actuator carried on the carrier and extending at least  
 8 substantially parallel to the centreline of the mould tool, the  
 9 Replacement Mould Part being mounted on the second slide under  
 10 control of the second actuator.

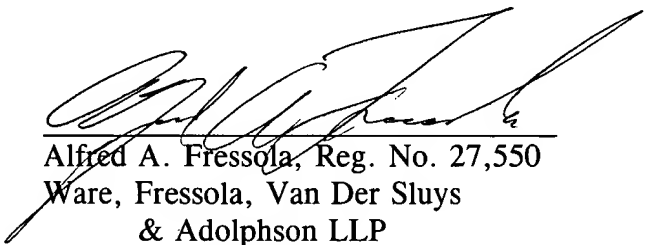
1 37. (Amended) A finish formed article made in accordance with the method of  
 2 [anyone of claims 1 to 22] claim 1.

Remarks

This preliminary amendment is filed for the purpose of placing the application into standard U.S. format. Consideration and allowance of the claims is earnestly solicited.

Respectfully submitted,

Date: 6/22/00

  
 Alfred A. Fressola, Reg. No. 27,550  
 Ware, Fressola, Van Der Sluys  
 & Adolphson LLP  
 Bradford Green, Building Five  
 755 Main Street, PO Box 224  
 Monroe, CT 06468  
 (203) 261-1234

AAF/aks